

Cable/DSL Broadband Router TL-R402M



PPPoE, Dynamic IP, Static IP, L2TP
Internet connection options
easily connect to Internet

Built-in firewall supports IP address
filtering, MAC address filtering
and Domain Name filtering

Virtual Server, Special Application,
DMZ host, and UPnP helping you
build your own servers



Description:

TP-LINK's TL-R402M is designed for Small Office / Home Office (SOHO) network solutions. With built-in NAT, DHCP server, firewall and 4 LAN ports, the TL-R402M will allow you to connect your network better than ever, sharing Internet access, files and fun, easily and securely.

Share Resources and Simplify the Network

The built-in four-port switch provides computers on the LAN with network connectivity and Internet access. Connect up to four PCs or other networking devices to access home/company resources and use the Internet.

Abundant forwarding rules

Virtual Server, Special Application, DMZ host and UPnP help you build your own servers, such as web page service, FTP service, etc.


Easy to install and use

Setting up for TL-R402M is straightforward. All the settings and configuration can be managed via a web-based utility. The Quick Setup Wizard is provided to help you set up your network in minutes. Firmware upgrades and notifications on our website are also readily available to ensure the routers are always up-to-date.

Specifications:

TL-R402M	Cable/DSL Broadband Router
Ports	WAN 1 10/100M Auto-Negotiation RJ45 port, Auto MDI/MDIX LAN 4 10/100M Auto-Negotiation RJ45 ports, Auto MDI/MDIX 10Base-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)
Network Media(Cable)	100Base-TX: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)
Standards	IEEE802.3 10Base-T; IEEE802.3u 100Base-TX
Internet Access	PPPoE, Dynamic IP, Static IP, L2TP
Security	VPN pass-through IP Address Filtering MAC Address Filtering Domain Name Filtering
DHCP	DHCP Server and Client
Forwarding Rules	Virtual Server Special Application DMZ Host UPnP Static Routing
Management	Web management Remote Web management
Power Supply	External power adapter
LEDs	Power, Link/Act, 100Mbps, M1, M2
Certifications	CE, FCC
Temperature	Operating: 0°C~40°C (32°F~104°F) Storage: -40°C~70°C (-40°F~158°F)
Humidity	Operating: 10%~90% RH Non-Condensing Storage: 5%~90% RH Non-Condensing
Dimensions(LxWxH)	6.3 x 4.0 x 1.1 in.(160 x 102 x 28 mm)

Diagram:

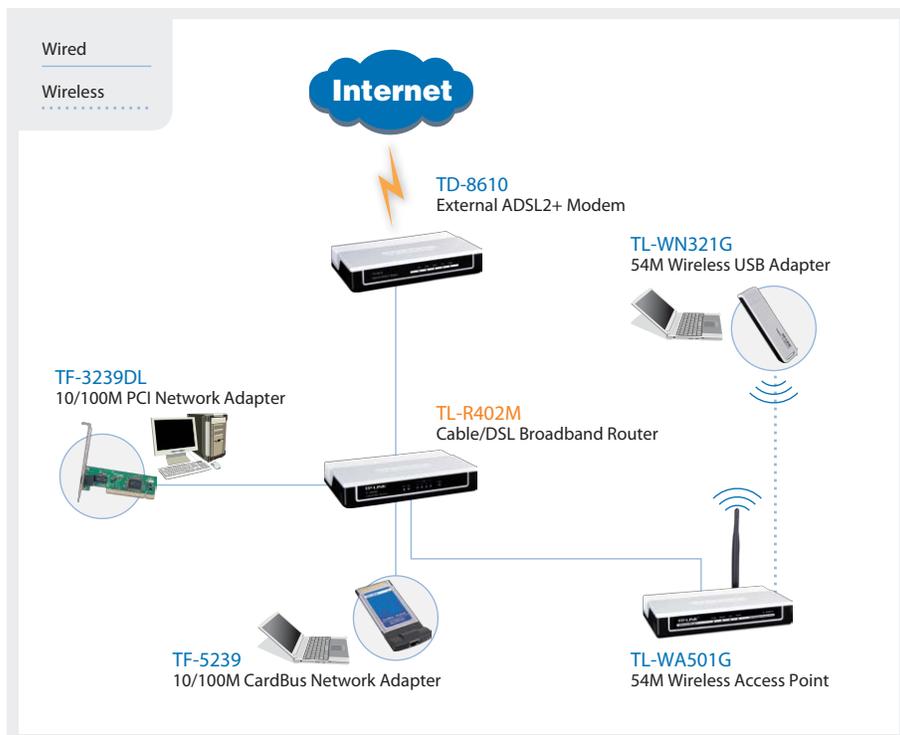

Features:

- 1 10/100Mbps RJ45 WAN port, 4 10/100Mbps RJ45 LAN ports, Auto-negotiation, Auto MDI/MDIX
- Complies with IEEE 802.3, IEEE 802.3u standards
- Built-in NAT and DHCP server shares Internet Access
- Supports PPPoE, Dynamic IP, Static IP and L2TP Internet Access
- Supports MAC Address Clone
- Built-in firewall supports IP Address Filtering, MAC Address Filtering and Domain Name Filtering
- Supports Virtual Server, Special Application, DMZ Host, UPnP, Static Routing and VPN Pass-through
- Provides system log to monitor the running of the device
- Web Management, Firmware Upgrade, Backup & Restore Configuration
- External power adapter

Package:

- One Cable/DSL Broadband Router
- Quick Installation Guide
- AC Power Adapter
- Resource CD

Related Products:

- External ADSL2+ Modem TD-8610
- 5-port 10/100M Desktop Switch TL-SF1005D
- 8-port 10/100M Desktop Switch TL-SF1008D
- 54M Wireless Access Point TL-WA501G
- 54M Wireless USB Adapter TL-WN321G
- 10/100M PCI Network Adapter TF-3239DL

Specifications are subject to change without notice. is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.